



STANDARD CURB

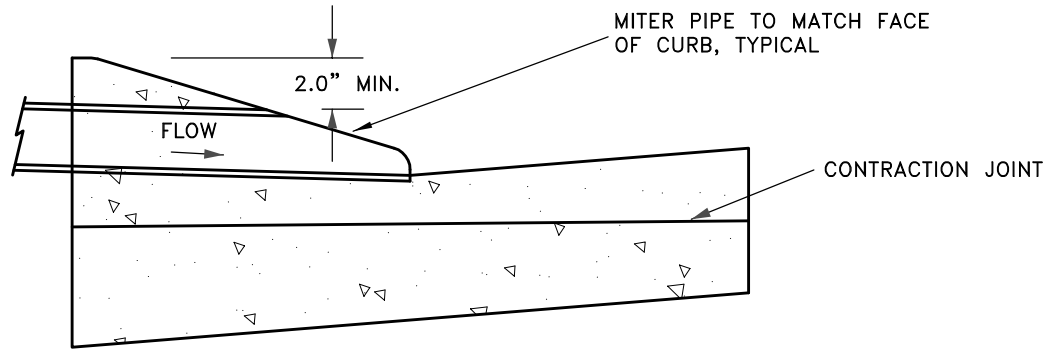

ROLLED CURB

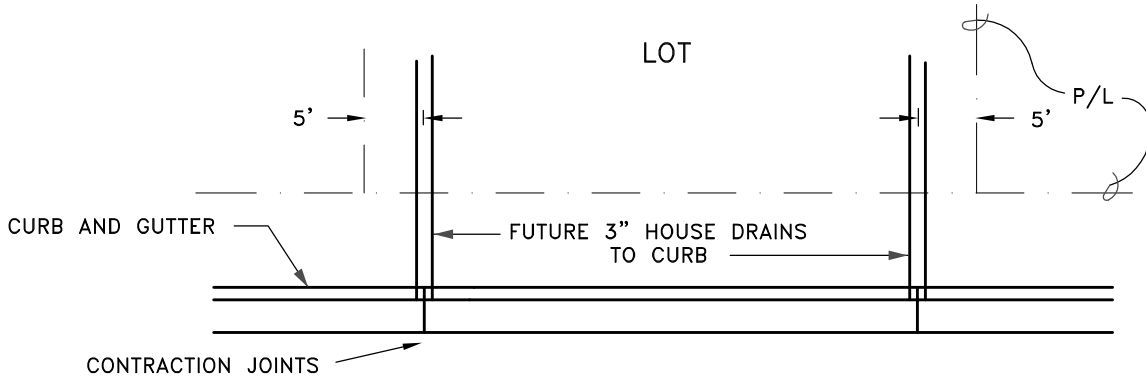

PLAN VIEW

NOTES:

1. INSTALL A MINIMUM OF TWO, 3" PVC SCHEDULE 40 PIPE CURB DRAINS TO SERVE FOR EACH LOT.
2. FOR UNDEVELOPED PROPERTY, THE CURB DRAINS SHALL BE INSTALLED 5' FROM EACH PROPERTY CORNER OR AT LOCATIONS DETERMINED BY THE ENGINEER.
3. FOR DEVELOPED PROPERTY, CURB DRAINS SHALL BE INSTALLED OPPOSITE ALL EXISTING DRAINAGE OUTLETS SERVING THE PROPERTY, OR AS DIRECTED BY THE ENGINEER.
4. WHEREVER POSSIBLE, CURB DRAIN LOCATIONS SHALL BE ADJUSTED TO COINCIDE WITH CONTRACTION JOINTS IN THE CURB AND/OR SIDEWALK. IF NOT A SCORE MARK SHALL BE PLACED OVER PIPE.
5. CURB DRAINS SHALL BE INSTALLED TRANSVERSE TO THE LENGTH OF THE CURB WITHOUT THE USE OF INTERMEDIATE ANGLE FITTINGS BETWEEN THE FACE OF THE CURB AND THE PROPERTY LINE.
6. THE 3" PVC PIPE SHALL BE INSTALLED TO THE PROPERTY LINE. THE PIPE SHALL HAVE POSITIVE FLOW FROM THE PROPERTY LINE TO THE GUTTER.
7. REMOVABLE CAPS SHALL BE INSTALLED IN CURB DRAIN OPENINGS AT THE CURB FACE UPON INITIAL CONSTRUCTION. CAPS SHALL BE REMOVED BY OTHERS AT TIME OF CONNECTION TO DRAINAGE PIPE. USE OATEY BRAND "MULIT-SIZE END-CAPS, OR APPROVED EQUAL.

CITY OF ALBANY, OREGON
PUBLIC WORKS DEPARTMENT

TYPICAL CURB DRAIN

NO SCALE

JANUARY 2018

NO. 306