


4' DIAMETER CIRCULAR PAVEMENT CUT

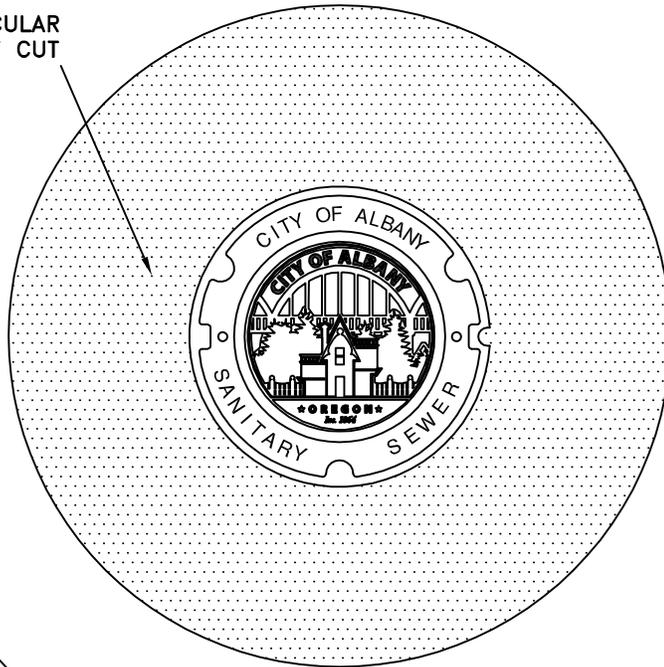


2" OF 1/2" DENSE GRADED ASPHALT

EXISTING PAVEMENT

ELEVATION OF FRAME TO BE WITHIN .01 FT. OF EXISTING PAVEMENT

EXISTING PAVEMENT

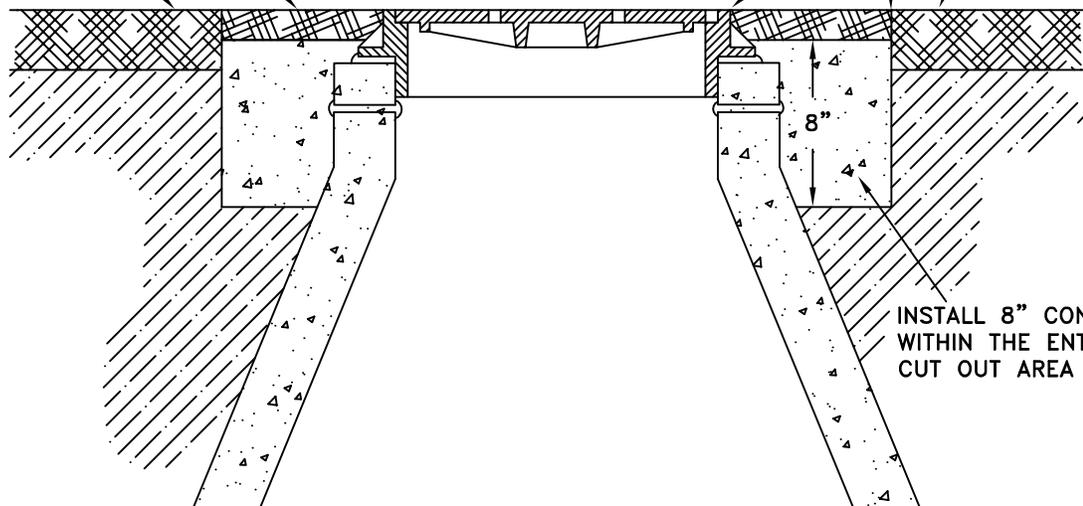

INSTALL 8" CONCRETE WITHIN THE ENTIRE CUT OUT AREA

NOTES:

1. POST-CONSTRUCTION MANHOLE FRAME AND COVER ADJUSTMENT WILL ONLY BE ALLOWED WHEN APPROVED BY THE CITY ENGINEER.
2. FINISH ELEVATION OF MANHOLE FRAME AND COVER ASSEMBLIES SHALL BE WITHIN .01 FT. OF THE ADJACENT STREET FINISH GRADE. IF THE DIFFERENCE IN ELEVATION EXCEEDS .01 FT., THE MANHOLE FRAME AND COVER ASSEMBLY SHALL BE ADJUSTED AS SPECIFIED HEREIN.
3. A 4' DIAMETER CIRCLE OF ASPHALT SHALL BE REMOVED AND THE ENTIRE AREA EXCAVATED TO A DEPTH OF 10" BELOW FINISH GRADE OF THE STREET. CONCRETE SHALL BE PLACED TO A DEPTH OF 8" WITHIN THE ENTIRE CUT OUT AREA. THE CONCRETE SHALL BE COVERED WITH 1/2" DENSE ASPHALT WITH A MINIMUM DEPTH OF 2 INCHES.
4. MAXIMUM DISTANCE BETWEEN THE TOP OF THE CONE SECTION AND FINAL SURFACE GRADE SHALL NOT EXCEED 15".
5. NO INTERIOR GROUTING IS ALLOWED.

CITY OF ALBANY, OREGON
PUBLIC WORKS DEPARTMENT

POST-CONSTRUCTION
MANHOLE FRAME AND COVER
ADJUSTMENT

NO SCALE

JULY 2019

NO. 409