


PEDESTRIAN REFUGE WHERE REQUIRED BY THE CITY ENGINEER. CONFIGURATION AND LOCATION OF THE REFUGE WILL REQUIRE APPROVAL OF THE ENGINEER. MAX. RAMP SLOPE SHALL BE 5%.

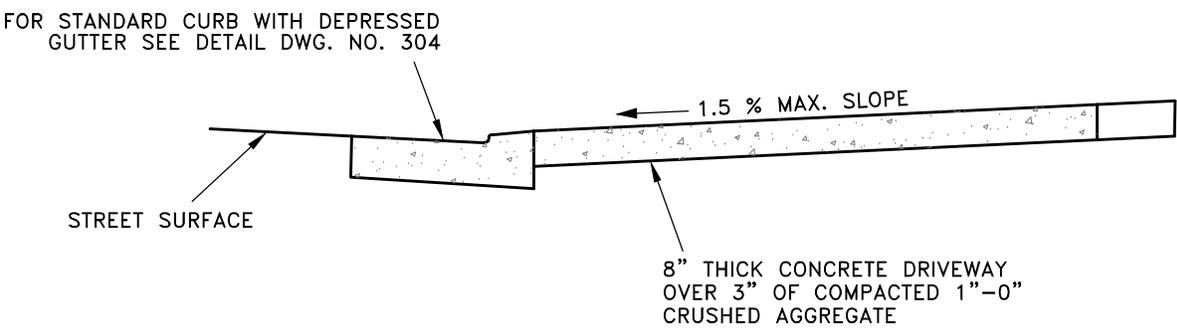

SECTION A-A
(NOT TO SCALE)

NOTES:

1. THIS TYPE OF APPROACH SHALL NOT BE USED WITHOUT APPROVAL OF THE CITY ENGINEER.
2. W = WIDTH REQUIREMENTS AS SPECIFIED IN THE DEVELOPMENT CODE, OR AS INDICATED ON CITY APPROVED CONTRACT DRAWINGS.
3. ALL CONCRETE TO HAVE A MINIMUM 28-DAY COMPRESSIVE STRENGTH OF 4000 P.S.I.
4. PROVIDE COLD JOINTS AS SPECIFIED @ 15' O.C. MAX.

CITY OF ALBANY, OREGON		
PUBLIC WORKS DEPARTMENT		
COMMERCIAL DRIVEWAY WITH STANDARD CURB RETURN		
NO SCALE	OCTOBER 2013	NO. 310